


SPECIFICATION 规格参数



SPECIFICATION CN			K-TEC110/U	K-TEC140/U	K-TEC180/U	K-TEC230/U	K-TEC270/U	K-TEC310/U	K-TEC360/U	K-TEC450/U	K-TEC530/U
国际标准注射容积 VB		cm ³									
注射装置			INJECTION UNIT								
螺杆直径	Screw Diameter	mm	42	48	55	60	65	70	75	80	90
理论注射容量	Shot Volume	cm3	222	360	510	670	805	1274	1546	1960	2797
注射重量 (PF)	Injection Weight(PS)	g	280	454	643	844	1014	1605	1948	2470	2545
注射速率 (PF)	Injection Rate	g/s	128	572	196	227	270	368	422	437	560
注射压力	Injection Pressure	Mpa	158	159	153	158	153	170	156	152	149
最大螺杆转速	Screw Speed	rpm	200	200	190	190	160	200	150	150	120
锁模装置			CLAMPING UNIT								
锁模力	Clamping force	kN	1100	1400	1800	2300	2700	3100	3600	4500	5300
移模行程	Toggle Stroke	mm	350	380	435	475	540	590	660	740	840
拉杆内间距	Space Between Tie-Bars (WxH)	mm*mm	370 X 370	420 X 420	470 X 470	520 X 520	570 X 570	615 X 615	660 X 660	760 X 730	830 X 800
模厚 (最小~最大)	Mold Height (Min~Max)	mm	100~330	110~400	130~450	150~480	150~500	150~580	200~630	230~730	300~780
顶出行程	Ejector Stroke	mm	80	100	115	120	130	130	160	180	220
顶出力	Ejector Tonnage	kN	30	50	50	70	70	70	110	150	150
顶出杆数		PC	5	5	5	9	9	13		13	13
其他			OTHERS								
最大油泵压力	Max. Pump Pressure	MPa	16	16	16	16	16	16	16	16	16
泵电机功率	Motor Power	KW	11	15	18.5	22	27	27	40	47	22+27
油箱容积	Oil Tank Capacity	L	160	185	230	290	380	380	650	700	800
机器外形尺寸	Machine Dimension	m*m*m	4.2×1.2×1.79	4.4×1.33×1.9	5.04×1.43×2.12	5.68×1.5×2.14	5.9×1.6×2.25	5.98×1.66×2.37	7.21×1.9×2.34	7.84×1.88×2.41	8.74×2.05×2.3
机器重量	Machine Weight	T	3.2	4	6	7	8	9	12.5	15.4	20

模板正面尺寸 PLATEN DIMENSIONS

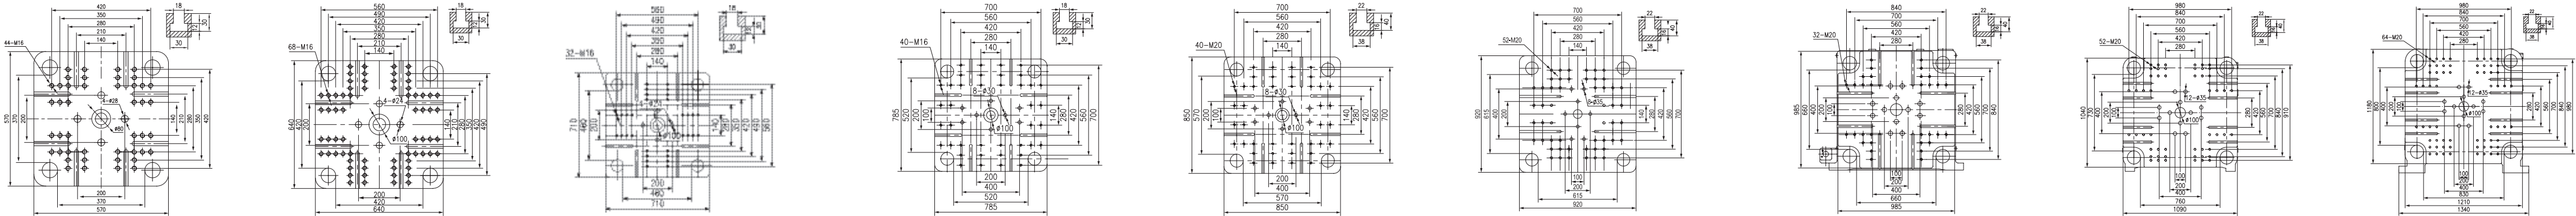

模板侧面尺寸 MOULD SPACE DIMENSIONS

