


SPECIFICATION 规格参数

本公司保留对产品进行修改的权利，数据如有变动，恕不另行通知。
We reserve the right to make any product improvement or specifications change without prior notice.



机型	SPECIFICATION	CN	K-TEC100			K-TEC120			K-TEC140			K-TEC170			K-TEC230			K-TEC270		
	国际标准注射容积 VB	cm³	358			450			473			633			824			1085		
注射装置	INJECTION UNIT		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
螺杆直径	Screw Diameter	mm	35	38	42	35	38	42	38	42	45	42	45	50	45	50	55	50	55	60
螺杆长径比	Screw L/D Ratio	L/D	22.8	21	19	22.8	21	19	22.1	20	18.7	23.5	22	19.8	23.4	21	19.1	25.2	22.9	21
理论注射容积	Shot Volume	cm3	163	192	235	163	192	235	226	277	318	311	357	441	397	490	593	530	641	763
注射重量	Injection Weight(PS)	g	148	175	213	148	175	214	206	252	289	283	325	401	362	446	540	482	583	694
注射速率	Injection Rate	cm3/s	90	104	128	92	108	130	94	115	132	138	160	196	124	154	186	187	227	270
注射压力	Injection Pressure	Mpa	219	186	158	219	186	158	209	171	149	203	177	143	207	168	138	205	169	142
螺杆转速	Screw Speed	rpm	205			220			220			200			175			185		
合模装置	CLAMPING UNIT																			
锁模力	Clamping force	KN	1000			1200			1400			1700			2300			2700		
移模行程	Toggle Stroke	mm	350			360			380			435			475			540		
拉杆间距	Space Between Tie-Bars (WxH)	mm	370x370			410 X 410			420x420			460x460			520x520			570x570		
最大模厚	Max. Mold Height	mm	380			400			450			510			530			580		
最小模厚	Min. Mold Height	mm	150			160			160			180			200			200		
顶出行程	Ejector Stroke	mm	100			100			120			135			140			150		
顶出力	Ejector Tonnage	KN	30			30			50			50			70			70		
其他	OTHERS																			
最大油泵压力	Max. Pump Pressure	Mpa	16			16			16			16			16			16		
电机功率	Motor Power	KW	11			14			14			21			28			36		
电热功率	Heater Power	KW	7.55			7.55			9.3			12.3			14.8			16.8		
外形尺寸	Machine Dimension	m	4.2x1.2x1.79			4.4x1.4x1.8			4.48x1.33x1.90			5.04x1.43x2.12			5.68x1.50x2.14			5.90x1.60x2.25		
油箱容积	Oil Tank Capacity	L	190			220			270			300			300			380		
机器重量	Machine Weight	ton	3.5			3.8			4.3			6			7			8.5		

模板正面尺寸 PLATEN DIMENSIONS

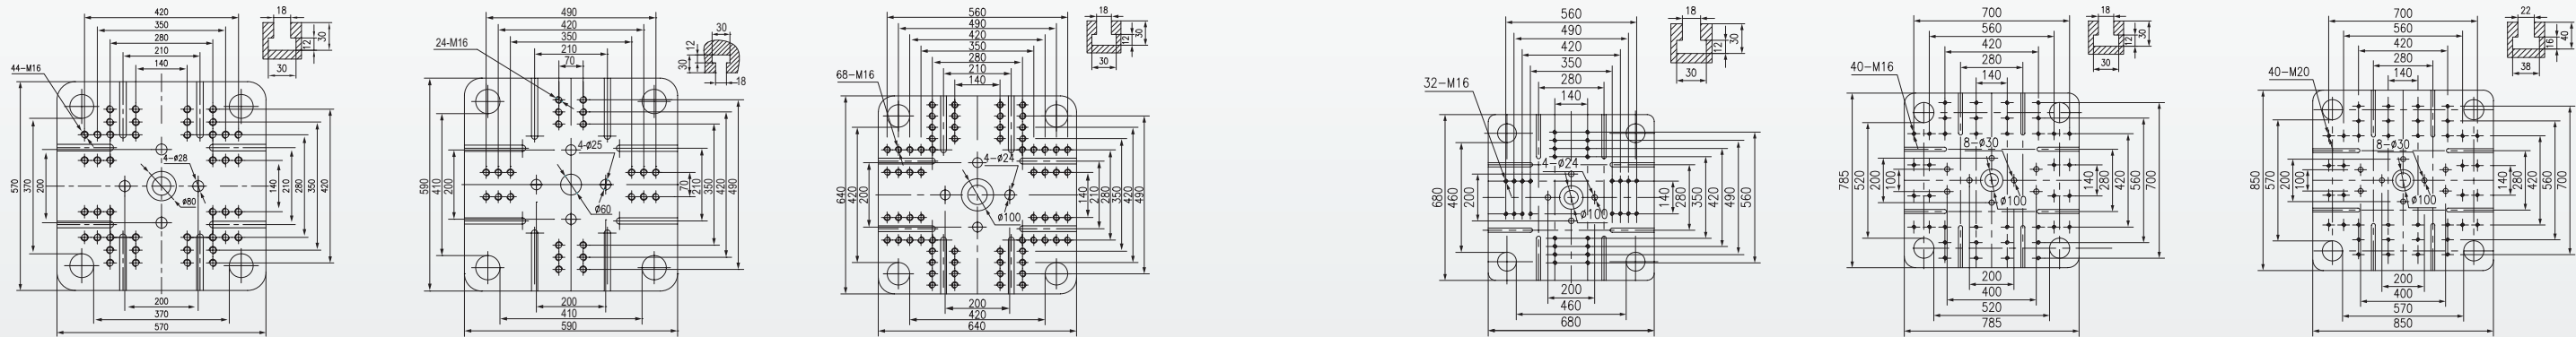

模板侧面尺寸 MOULD SPACE DIMENSIONS




SPECIFICATION 规格参数

本公司保留对产品进行修改的权利，数据如有变动，恕不另行通知。
We reserve the right to make any product improvement or specifications change without prior notice.



机型		SPECIFICATION	CN	K-TEC320			K-TEC360			K-TEC400			K-TEC450			K-TEC500			K-TEC530		
		国际标准注射容积 VB	cm³	1354			2418			2418			2987			3258			4155		
注射装置		INJECTION UNIT		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
螺杆直径	Screw Diameter	mm		55	60	65	65	70	75	65	70	75	70	75	80	75	80	85	80	85	90
螺杆长径比	Screw L/D Ratio	L/D		22.9	21	19.4	22.5	21	19.6	22.6	21	19.6	22	20.5	19.2	23.5	22	20.7	22.3	21	19.8
理论注射容积	Shot Volume	cm3		677	805	945	1161	1347	1546	1161	1347	1546	1500	1723	1960	1810	2060	2325	2210	2495	2797
注射重量	Injection Weight(PS)	g		616	733	860	1057	1226	1407	1057	1226	1407	1365	1568	1784	1647	1875	2116	2011	2270	2545
注射速率	Injection Rate	cm3/s		223.5	266	312.2	337	368	422	337	368	422	335	384	437	364	417	451	442	499	560
注射压力	Injection Pressure	Mpa		200	168	143	208	179.6	156	208	179	156	199	173	152	180	158	140	188	167	149
螺杆转速	Screw Speed	rpm		185			155			155			150			105			120		
合模装置		CLAMPING UNIT																			
锁模力	Clamping force	KN		3200			3600			4000			4500			5000			5300		
移模行程	Toggle Stroke	mm		615			615			740			740			840			840		
拉杆间距	Space Between Tie-Bars (WxH)	mm		670x650			670x650			760 X 730			760x730			830x800			830x800		
最大模厚	Max. Mold Height	mm		680			680			780			780			830			830		
最小模厚	Min. Mold Height	mm		250			250			280			280			350			350		
顶出行程	Ejector Stroke	mm		160			160			200			200			240			240		
顶出力	Ejector Tonnage	KN		90			90			150			150			150			150		
其他		OTHERS																			
最大油泵压力	Max. Pump Pressure	Mpa		16			16			16			16			16			16		
电机功率	Motor Power	KW		36			43			43			56			56			28+36		
电热功率	Heater Power	KW		18.3			24.6			24.6			28.7			30.7			32.6		
外形尺寸	Machine Dimension	m		7.1x1.9x2.34			7.1x1.9x2.34			7.24x1.88x2.41			7.84x1.88x2.41			8.54x2.05x2.3			8.74x2.05x2.3		
油箱容积	Oil Tank Capacity	L		450			600			650			700			700			800		
机器重量	Machine Weight	ton		11.5			12.5			15			15.4			18			20		

模板正面尺寸 PLATEN DIMENSIONS

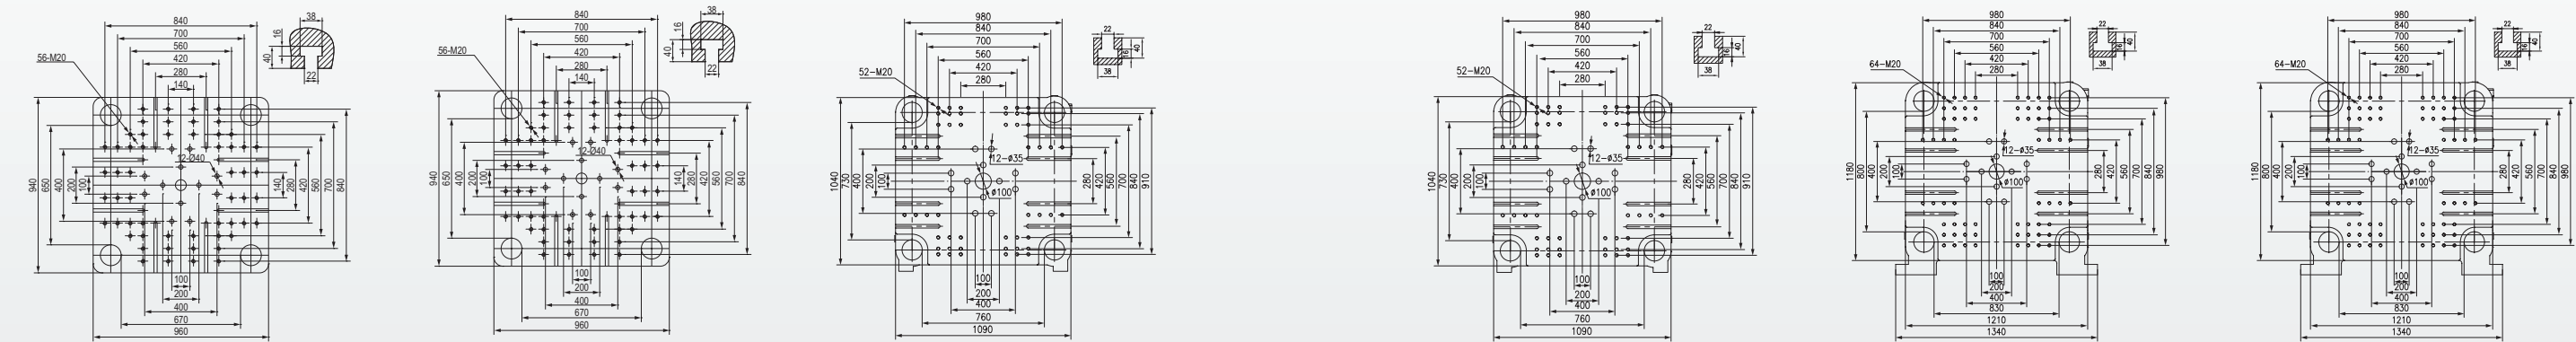


模板侧面尺寸 MOULD SPACE DIMENSIONS



机型	SPECIFICATION	CN	K-TEC600				K-TEC650				K-TEC800				K-TEC1000				K-TEC1200				K-TEC1400				K-TEC1600			
国际标准注射容积 VB		cm³	4155				4680				5706				6353				9792				13060				14452			
注射装置	INJECTION UNIT		A	B	C	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	
螺杆直径	Screw Diameter	mm	80	85	90	90	95	100	105	90	95	105	110	90	100	110	115	110	115	120	125	110	120	130	140	120	130	140	150	
螺杆长径比	Screw L/D Ratio	L/D	22.3	21	19.8	20.4	19.4	18.4	17.5	23.2	22	19.9	19	25.5	23	20.9	20	23	22	21	20.2	25.7	24	22	20	25.4	23.4	21.7	18.9	
理论注射容积	Shot Volume	cm3	1965	2219	2487	2544	2835	3141	3663	2926	3260	3983	4371	2920	3610	4369	4778	5270	5760	6272	6805	6271	7463	8759	10158	7368	8759	10159	11662	
注射重量	Injection Weight(PS)	g	1788	2019	2264	2315	2580	2858	3151	2663	2967	3624	3978	2670	3300	3980	4325	4796	5242	5707	6193	5706	6791	7970	9243	6704	7970	9244	10612	
注射速率	Injection Rate	cm3/s	442	499	560	552	612	679	748	574	640	781	858	580	717	867	948	793	867	944	1024	815	970	1138	1320	1056	1240	1438	1650	
注射压力	Injection Pressure	Mpa	188	167	149	184	165	149	135	195	175	143	130	216	176	146	133	186	170	156	144	208	175	150	129	195	165	145	126	
螺杆转速	Screw Speed	rpm	120				145				125				100				90				90				85			
合模装置	CLAMPING UNIT																													
锁模力	Clamping force	KN	6000				6500				8000				10000				12000				14000				16000			
移模行程	Toggle Stroke	mm	850				870				1000				1100				1250				1350				1550			
拉杆间距	Space Between Tie-Bars(WxH)	mm	860x810				875x875				1020x970				1125x1085				1180x1100				1310x1300				1500x1400			
最大模厚	Max. Mold Height	mm	830				900				960				1100				1250				1400				1500			
最小模厚	Min. Mold Height	mm	350				350				400				500				500				600				700			
顶出行程	Ejector Stroke	mm	225				250				300				335				325				360				420			
顶出力	Ejector Tonnage	KN	150				150				210				216				245				260				420			
其他	OTHERS																													
最大油泵压力	Max. Pump Pressure	Mpa	16				16				16				16				16				16				17.5			
电机功率	Motor Power	KW	36+36				43+36				43+56				43+56				56+56				43+43+43				56+56+56			
电热功率	Heater Power	KW	32.6				46				54.3				59				66.1				86				94.9			
外形尺寸	Machine Dimension	m	9.1×2.0×2.6				10.2×2.24×2.71				11.8×2.24×2.71				12.1×2.64×3				12.54×2.66×3.27				15.2×3×4.13				16.35×3.15×4.17			
油箱容积	Oil Tank Capacity	L	1000				1100				1200				1400				2100				2900				3000			
机器重量	Machine Weight	ton	26				30				39				50				55				90				125			

模板正面尺寸

PLATEN DIMENSIONS

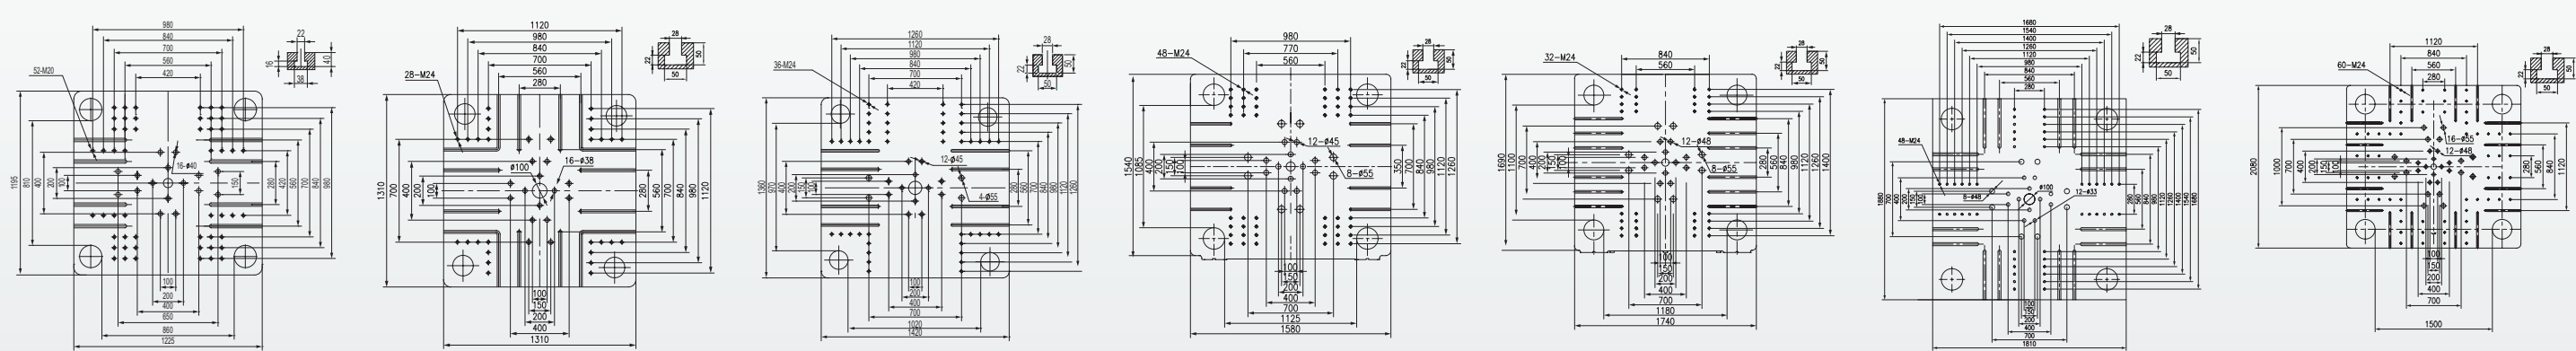

模板侧面尺寸

MOULD SPACE DIMENSIONS

